TOPGUN 40M PLASMA

Specifications	
Input Voltage (V)	240 A/C
Frequency (Hz)	50 / 60 Hz
Input Current Range (A)	30A
Ouput Current Range (A)	40A
Adjustment Current Range (A)	15-40A CUT
Cutting Thickness	Recommended 8mm
	Severance 12mm
Rated Duty Cycle (%)	60% @ 40A
	100% @ 30A
Gas Flow	30-100 L-min
Machine Weight	13.4 Kg
Machine Dimensions (mm)	640x390x520
Package Weight	
Package Dimensions	
Warranty	3 Years

Package Includes

- Users Manual
- 4 MTR Plasma Torch
- 3 MTR Earth Lead
- Air Regulator/Water Trap
- Fitted 15A Plug
- Consumable Starter Kit

Ordering Information

Topgun Plasma CUT 40	TGWP40

Optional Extras

Retaining Cap	TGPC 0003
Swirl Ring	TGPE0007
Plasma Tips 1.0mm (Extended)	TGPD006310
Plasma Tips 1.2mm (Extended)	TGPD006312
Plasma Tips 1.0mm (Short)	TGPD008810
Plasma Tips 1.2mm (Short)	TGPD008812
Plasma Electrode (Short)	TGPR0016
Plasma Electrode (Extended)	TGPR0065

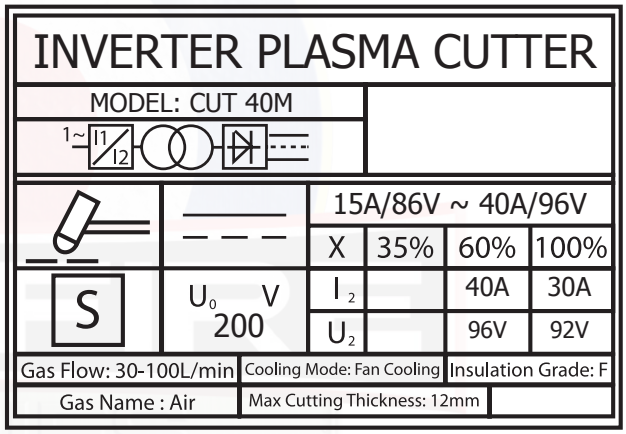

Generator Friendly



Input Voltage

Heavy Duty Cycle